

18-1/8" Depth, 6" High	MODEL
<ul style="list-style-type: none"> <li>◆ 360± CFM @ 2.5 to 4.9 Sones</li> <li>◆ 7" Round Duct</li> </ul>	C2030SD2-SS C2036SD2-SS C2042SD2-SS
<ul style="list-style-type: none"> <li>◆ 430± CFM @ 2.5 to 7.6 Sones</li> <li>◆ 7" Round Duct</li> </ul>	C2030SD4-SS C2036SD4-SS C2042SD4-SS C2048SD4-SS
12" Depth, 6" High	MODEL
<ul style="list-style-type: none"> <li>◆ 430± CFM @ 2.5 to 7.6 Sones</li> <li>◆ 7" Round Duct</li> </ul>	C2024SD4-12-SS C2030SD4-12-SS C2036SD4-12-SS C2042SD4-12-SS
18-1/8" Depth, 6" High Non Vented	MODEL
<ul style="list-style-type: none"> <li>◆ Elbow Transition Included</li> <li>◆ Charcoal Combo Filters</li> </ul>	C2030SD2-NV-SS C2036SD2-NV-SS C2042SD2-NV-SS



C2000SD2



C2000SD4



C2000SD4-12

## Powered Liner — C2000 Air Ring Fan Slim Baffle Series

18-1/8" Depth, 6" High Slim Baffle	MODEL
<ul style="list-style-type: none"> <li>◆ 390± CFM @ 2.5 to 7.6 Sones</li> <li>◆ 7" Round Duct</li> </ul> <p>C2000SD4SB is designed to meet the Builder Code of 400 CFMs without a make-up air kit.</p>	C2030SD4SB-SS C2036SD4SB-SS C2042SD4SB-SS C2048SD4SB-SS
<ul style="list-style-type: none"> <li>◆ 325± CFM @ 2.5 to 4.9 Sones</li> <li>◆ 7" Round Duct</li> </ul>	C2030SD2SB-SS C2036SD2SB-SS C2042SD2SB-SS


### FEATURES:

- ◆ Variable or Rocker Controls.
- ◆ Center Panel Lighting: LED bulbs Included.
- ◆ Filters: Aluminum Mesh
- ◆ Filters: Slim Baffle
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Suggested Distance Code: 30" above cooking surface.

### OPTIONS:


- ◆ Flange for the perfect fit. See accessories.
- ◆ Remote Wiring. See accessories.

NO Performance Warranty over BBQ Grill/Griddle.

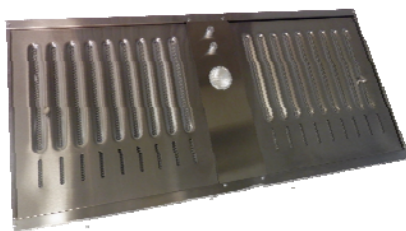

C2000SD4SB

# Ventilator Insert Specifications

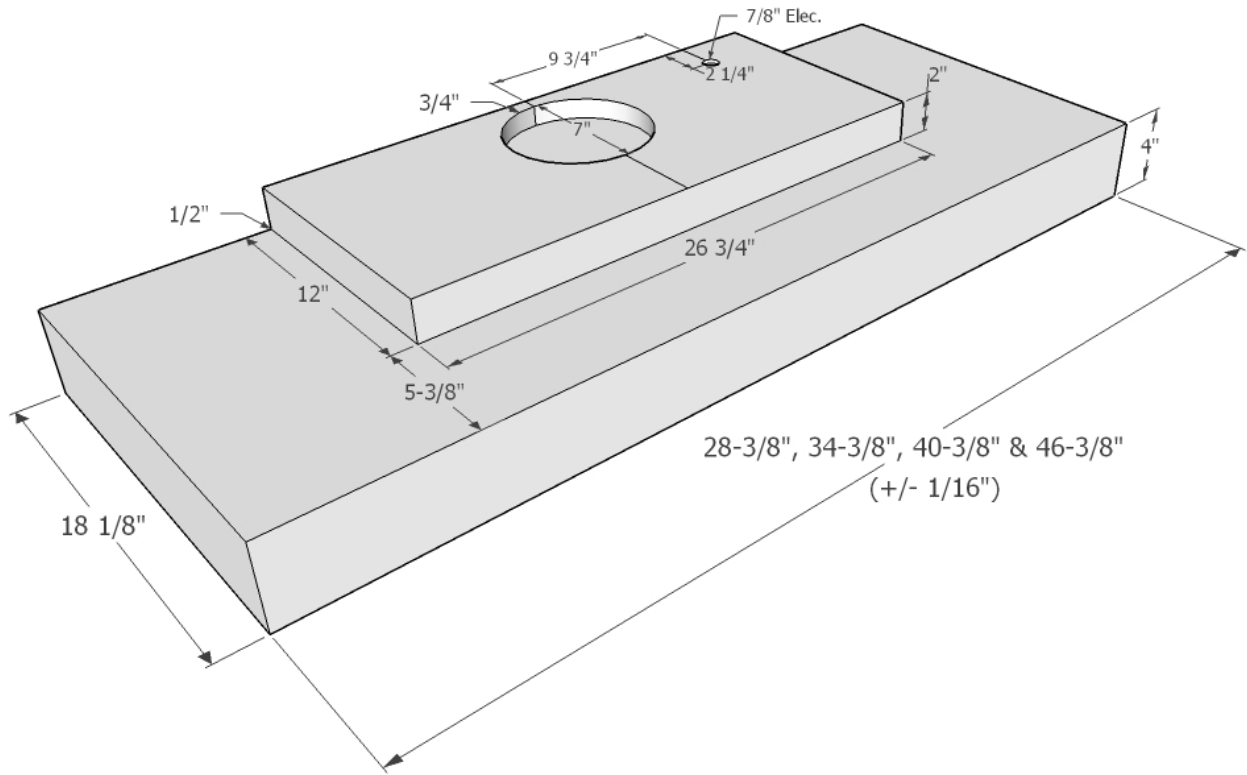

**SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!**

All dimensions are  $(\pm) 1/16$ " and are subject to change. Drawings are not to scale.